



**BakerSeries Triple Wide Roll-in Proofer**

Item No. \_\_\_\_\_  
 Project \_\_\_\_\_  
 Quantity \_\_\_\_\_

**MODEL: LRP3C - Series**



Model LRP3-40 Shown

**MODEL / RACK CAPACITY**

Model / Depth	Side Load	End Load	Double
LRP3-30	3 Racks	4 Racks	None
LRP3-40	3 Racks	4 Racks	3 racks
LRP3-50	6 Racks	4 Racks	3 Racks
LRP3-60	9 Racks	8 Racks	3 Racks
LRP3-70	9 Racks	8 Racks	3 Racks
LRP3-80	12 Racks	8 Racks	6 Racks
LRP3-90	12 Racks	12 Racks	6 Racks
LRP3-100	15 Racks	12 Racks	6 Racks
LRP3-110	15 Racks	16 Racks	6 Racks
LRP3-120	18 Racks	16 Racks	9 Racks

**Construction Features**

- Two door, triple wide design
- Heavy duty stainless steel exterior with 300 Series stainless steel interior and aluminized steel top
- Walls Ceilings and doors are foam insulated
- Modular wall and ceiling panels with cam lock construction
- Rapid responding air-wash heat and humidity system
- 208/240 VAC single or 3-phase power, field convertible

**Performance Features**

- 70 - 120 Degree F proofing range
- 50 - 99% humidity range
- Non-submerged calrod type heaters
- Interior bumpers protect interior walls from damage
- Lighted interior

**Controls Features**

- All digital controls mounted in the door at eye-level
- PID Type controls for rapid accurate response without overshoot
- Digital set Temperature, Humidity, Time
- Installed in the left hand door at eye-level
- Large LED displays

**Short Bid Specification:**

Proofer shall be an **LBC Bakery Equipment Model LRP3-** [insert 30, 40, 50, 60, 70, 80, 90, 100, 110, 120] 5 to 13.2kW electrically heated, 2-door, triple-wide roll-in rack unit with: quick responding air-wash heat / humidity system; modular foam insulated cam lock panel construction; all 300 series stainless steel interior, with protective cart bumpers; heavy-duty door with magnetic seal/mechanical closure system and full width protective bar handle; simple computerized controls, door mounted at eye-level, with accurate digital temperature, humidity and time readouts; plus all the features listed and options checked.

**STANDARD PRODUCT WARRANTY**

One-Year Parts and Labor (contiguous US Including Alaska and Hawaii, Canada)



Sheet Number LRP3 v 12 (rev 11/08)



**BakerSeries Triple Wide Roll-In Proofer**

**MODEL: LRP3 -Series**


**INSTALLATION REQUIREMENT**

Ships KD requires on-site installation  
 Either 208 or 240 VAC 1 or 3-phase

1/2" NPT Cold water connection  
 1/2" PVC vented drain connection

**OPTIONS & ACCESSORIES**

Stainless Steel Floor

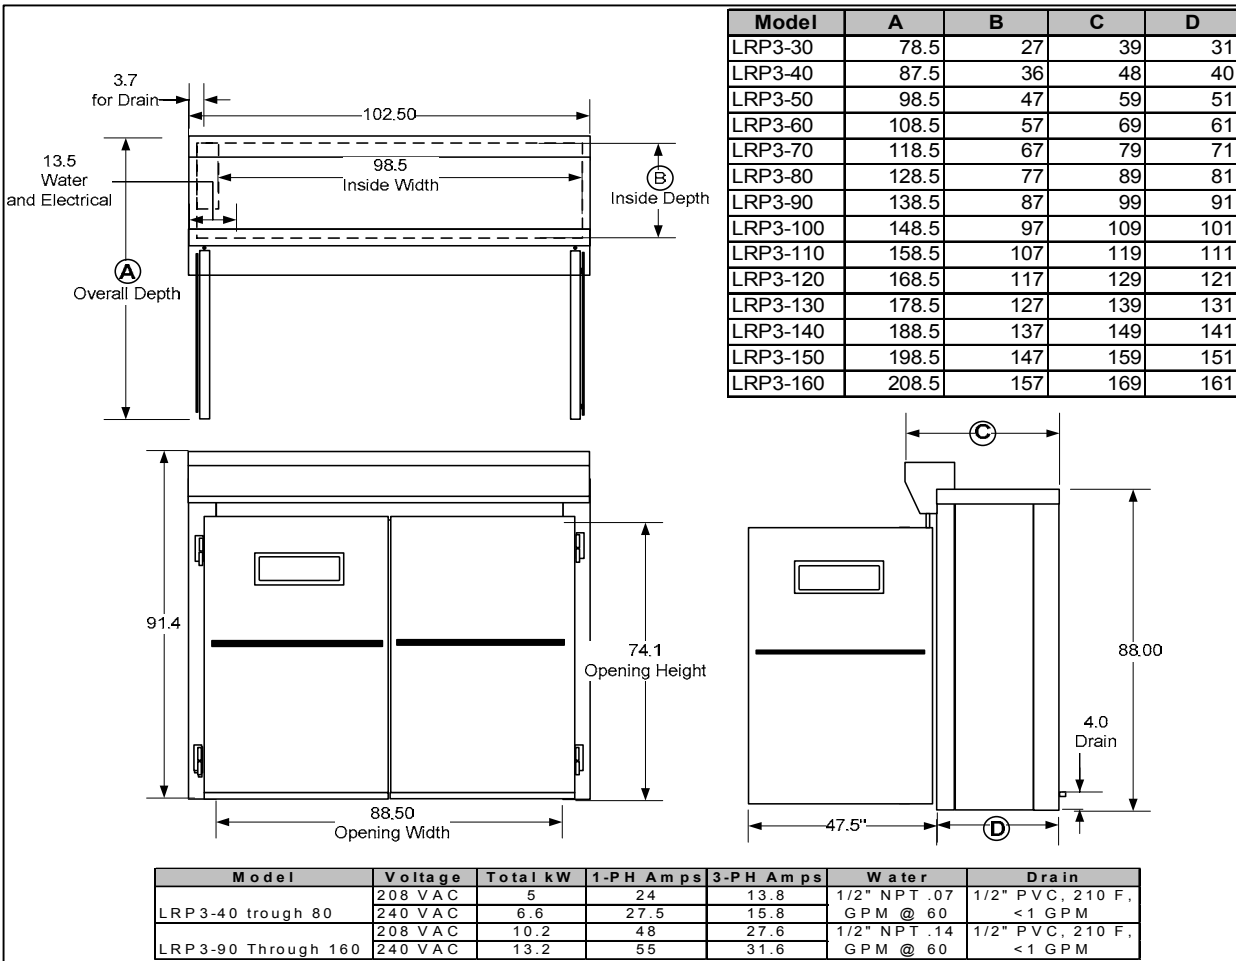

**IMPORTANT: Your local water conditions may damage your LBC appliance.** Failure to properly treat water may result in damage and may void your warranty. Ensure that your water supply meets these minimum water quality specification.

Parameter	Unit	Value
Alkalinity	ppm	22
Aluminum	ppb	17
Calcium	ppm	3.3
Free Chlorine Residual	ppm	0.6

Parameter	Unit	Value
Magnesium	ppm	0.65
pH	s.u.	8.5
Sodium	ppm	8.5
Total Hardness	ppm	11.9